



1x9 1.25G Multimode Transceiver

Features	Applications
High Quality 850nm VCSEL Transmitting Distance up to 220m with 62.5/125μm MMF, 500m with 50/125μm MMF. PECL Logic Interface Low Cost, Low Power Consumption Single +5.0V Power Supply	Gigabit Ethernet Fiber Channel Links at 1.06 Gb/s

Specifications**Electrical and Optical Characteristics(Condition: T_a=T_{op})**

Parameter	Symbol	Min.	Typical	Max.	Unit
Data Rate	B	--	1250	--	Mb/s
Center Wavelength	λ_c	830	850	860	nm
Output Spectral Width	$\Delta \lambda$	--	--	0.85	nm
Output Optical Power*	P ₀	-9.5	--	-3	dBm
Extinction Ratio	E.R.	9	--	--	dB
Operating Current	I _{cc}	--	60	80	mA
Operating Voltage	V _{cc}	+4.75	+5	+5.25	V
Input Voltage-Low	V _{IL}	-1.810	--	-1.475	V
Input Voltage-High	V _{IH}	-1.165	--	-0.880	V
Rising Time	T _r	--	1	3.0	ns
Falling Time	T _f	--	1	3.0	ns
Operating Wavelength	λ	--	850	--	nm
Receiver Sensitivity	P _{min}	--	--	-17	dBm
Maximum Optical Power	P _{max}	-3	--	--	dBm
Operating Current	I _{cc}	--	70	100	mA
Supply Voltage	V _{cc}	+4.75	--	+5.25	V
LOS Output-Low	V _{IL}	-1.810	--	-1.475	V
LOS Output -High	V _{IH}	-1.165	--	-0.880	V
LOS Asserted (H-L)	PD	--	--	-20	dBm
LOS Deasserted (L-H)	PA	-35	--	--	dBm

*Measure the average power coupled into 62.5/125μm, 0.275NA graded index Multi-Mode fiber.

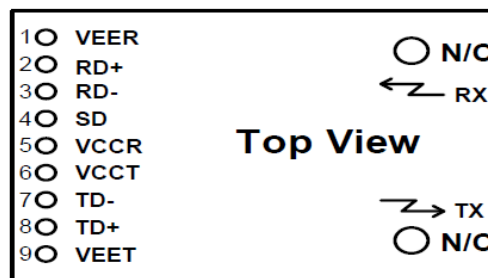


**Absolute Maximum Ratings(TC=25°C)**

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T _{ST}	-40	+85	C
Supply Voltage	V _{CC}	0	+6	V
Input Voltage	V _{IN}	0	V _{CC}	V
Soldering Temperature & Time	--	--	240/10	C /S

Recommended Operating Environment

Parameter	Symbol	Min.	Typical	Max.	Unit
Supply Voltage	V _{CC}	+4.75	+5.0	+5.25	V
Operating Temperature	T _{OP} (Commercial grade)	0	--	+70	C
	T _{OP} (Industrial grade)	-40	--	+85	C

Pin Description

Pin	Name	Level	Description
1	V _{EER}		Negative power of receiver section, normally grounded
2	RD+	PECL	Receiver Data Output
3	RD-	PECL	Inverted Receiver Data Output
4	SD	PECL	Optical alarm of receiver section,High level when normal, low level when no light
5	V _{CCR}		Positive power of receiver section, normally +5.0V
6	V _{CCT}		Positive power of transmitter section, normally +5.0V
7	TD-	PECL	Inverted Transmitter Data input
8	TD+	PECL	Transmitter Data input
9	V _{EET}		Negative power of transmitter section, normally grounded

Ordering Information

TRAN	Packaging	Data Rate	Wavelength	Connector	Operation Temperature	Operation Voltage	SD Interface
TRAN	1x9 SFP	155M 1.25G	1310 850	SC/PC ST/PC	1=0 ~ +70 C 2=-4 ~ +85 C	5= +5V 3= +3.3V	P=PECL T=TTL