




PM Patchcord

Features	Applications
High Return Loss	Fiber Sensor
High Extinction Ratio	Fiber Laser
Low Insertion Loss	PM EDFA
High Reliability	Research

Specifications

Parameter	Unit					
Connector Type		FC/UPC, SC/UPC, FC/APC, SC/APC, LC/UPC, LC/APC, MU/UPC,				
Wavelength	nm	1310, 1550	980, 1060,	850	780	633
Insertion Loss	dB	≤0.3	≤0.5	≤0.8	≤0.8	≤1.5
Return loss	UPC	dB	≥50			
	APC	dB	≥60			
Extinction Ratio at 23℃	dB	≥23	≥23	≥22	≥22	≥20
Fiber Type		PM1310, PM1550	PM980	PM850	PM780	PM630
Key Orientation		Slow Axis				
Axis Alignment	deg	±3				
Operating temperature	℃	-20~+70				
Storage temperature	℃	-40 ~ +85				

Package Dimensions

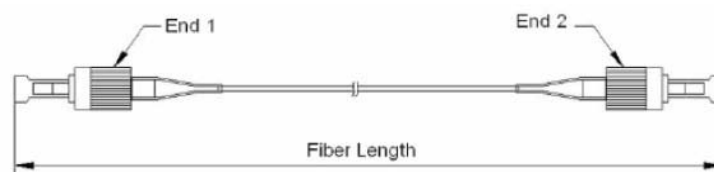

Ordering Information

PMJP	Wavelength	Pigtail	Fiber	Length	Connector1	Connector2
	633	0=250um bare	5= Panda	0.5m	FC/UPC	FC/UPC
	780	Fiber	Fiber	1m	FC/APC	FC/APC
	850	1=900um loose tube		2m	SC/UPC	SC/UPC
	980	2=2mm loose tube		3m	SC/APC	SC/APC
	1064	3=3mm loose tube		4m	LC/UPC	LC/UPC
	1310			5m	LC/APC	LC/APC
	1550				MU	MU