



LP Technical Development Ltd


PM Tap PD Monitor(1064nm)

Features	Applications
High Reliability High Extinction Ratio Low Insertion Loss	Fiber laser

Specifications

Parameter	Unit		
Operating wavelength	nm	1064	
bandwidth	nm	±40	
Tap ratio	%	1%	5%
Responsibility	mA/W	8	40
Insertion loss	dB	0.35	0.6
Extinction Ratio	dB	≥20	
Return loss	dB	≥45	
Fiber		Panda fiber	
Power Handling	mW	300	
Operating temperature	℃	0 ~ +50	
Storage temperature	℃	-40 ~ +85	
Dimensions	mm	Φ5.5 × L26	

Package Dimensions

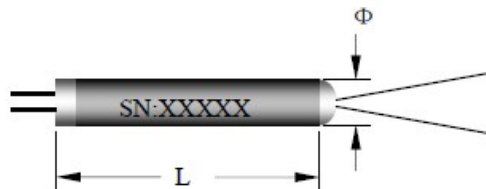

Ordering Information

PMTM	Wavelength	Coupling Ratio	Pigtail	Fiber	Length	Connector
	1064	1%=1/99 5%=5/95 10%=10/90	0=250um bare Fiber 1=900um loose tube	5= Panda Fiber	0.8m 1m	FC,SC,LC,ST ,MU/UPC,AP C

<http://www.lptechnical.com>