



MARS1003G

3 Port Full Gigabit Industrial Media Converter



Introduction

MARS1003G is a kind of industrial gigabit media converter, it support 2 10Base-T/100Base-TX/1000 Base-TX port and 1 1000Base-X SFP port. It is easy to check the network connection status, It also support CE,FCC standard, IMC102GT adopt industry standard design, IP40 protection, rugged high-strength metal case, power supply input(12V~48VDC), -40 to 85°C working temperature

- 1.Support 2 port 10Base-T/100Base-TX/1000 Base-TX and 1 port 1000Base-X SFP
- 2.Support IEEE802.3/802.3u/802.3x/802.3z, store and forward
- 3.Ethernet port support 10/100/1000M self-adaption
- 4.DC12~48V power input
- 5.IP40 protection grade, high strength iron shell, DIN Rail installation

Specification

Technology

Standard: IEEE802.3, IEEE802.3u, IEEE802.3z, IEEE802.3x

Flow control: IEEE802.3x flow control, Back-pressure based flow control

Interface:

Gigabit Ethernet port:10Base-T/100Base-TX/1000Base-TX Self-adaption

Gigabit fiber port: 1000Base-X SFP

Transmission:

Twisted pair: 100M (Standard CAT5/CAT5e cable)

Multi mode fiber: 1310nm, 500m

Single mode fiber: 1310nm, 20/40/60Km

1550nm,20/40/60/80/100/120Km

Exchange of attribute:

100M forward speed: 148810pps

1000M forward speed: 1488100pps



Transmission: Store and forward

Memory: 1Mbits

MAC address: 1K

LED Indicator:

System running indicator: RUN

Power supply indicator: PWR

RJ45 Link/Act indicator: G1,G2

Optic Fiber Link/Act indicator: FX

Power supply:

Power input: 24VDC(12~48VDC)

Terminal block: 3 bits 7.62mm terminal block

No-load power consumption: 1.18W@24VDC

Full-load power consumption: 3.19W@24VDC

Support reverse connection protection

Mechanical:

Shell: IP40, high strength iron shell.

Installation: DIN Rail

Weight: 356g

Dimension(W×H×D): 110mm×35mm×95mm

Environmental:

Operating Temperature: -40 to 85°C

Storage Temperature: -45°C to 85°C

Ambient Relative Humidity:

10 to 95% (non-condensing)

Standard:

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 4

EN61000-4-4 (EFT), Level 1

EN61000-4-5 (Surge), Level 3

Shell: IEC 60068-2-27

Warranty:


Warranty time: 5 years

Certification:

CE, FCC, RoHS, PAL, UL508(pending)



Dimension

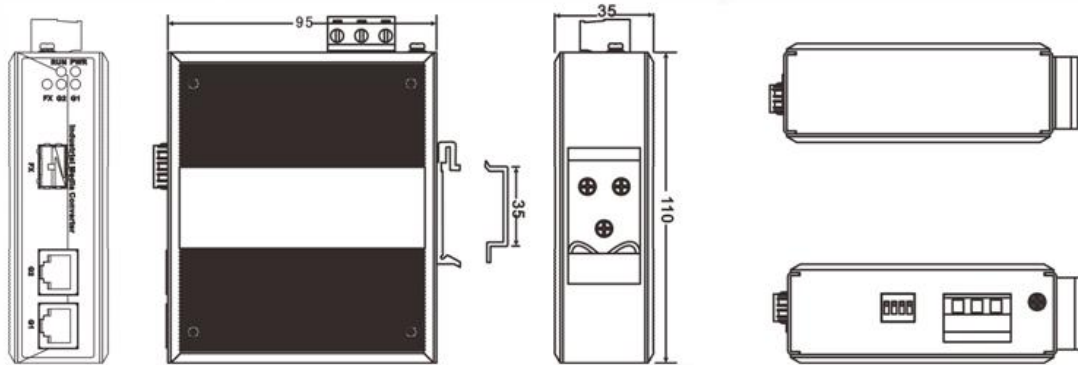

Order Information

MARS1003G- _____ - _____
Ports PS

Ports

2GT/1GS = 4 x 10/100/1000BASE-TX RJ45 Port, 2 x Gigabit SFP Slot

PS: Power Supply

L2 = 24VDC(12~48VDC), dual redundant power input

Example Order Codes

MARS1003G-2GT/1GS-L2

2 x 10/100/1000BASE-TX RJ45 Port, 1 x Gigabit SFP Slot, 24VDC(12~48VDC), dual redundant power input